

Datasheet

MicroSD Card

3IE4 series

- SD 3.0 interface
- Support Class 10 with UHS-I
- Adopt TLC NAND flash
- High performance
- Targeted for portable and stationary applications
- SMART function supported



Introduction

Innodisk MicroSD 3IE4 series, supporting class 10 with UHS-I, are specifically designed for industrial PC and embedded applications. The 3.0 series SD card has latest firmware architecture and Flash algorithms, including superior wear leveling, and read disturb management ensuring highest reliability and endurance.

Innodisk MicroSD 3IE4 series provide wide range capacities from 8GB to 128GB with excellent quality TLC NAND Flash, and fully compliant to SD3.0, and SD2.0 specifications.

With its low power consumption and features above, Innodisk MicroSD 3IE4 series can be applied on industrial automation, SBC (single-board computer), medical equipment, infotainment, and mobile application.

MicroSD Card

3IE4 series

Contact us for more information about the MicroSD 3IE4 series.

Innodisk is a service-driven provider of industrial embedded flash storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886-2-77033000

Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com

+1-510-770-9421

Europe

eusales@innodisk.com

+31-40-3045-400

Japan

jpsales@innodisk.com

+81-3-6667-0161

China

sales_cn@innodisk.com

+86-755-21673689


www.innodisk.com

© 2021 Innodisk Corporation.

All right reserved. Specifications are subject to change without prior notice.

2019.09.04

Diagram

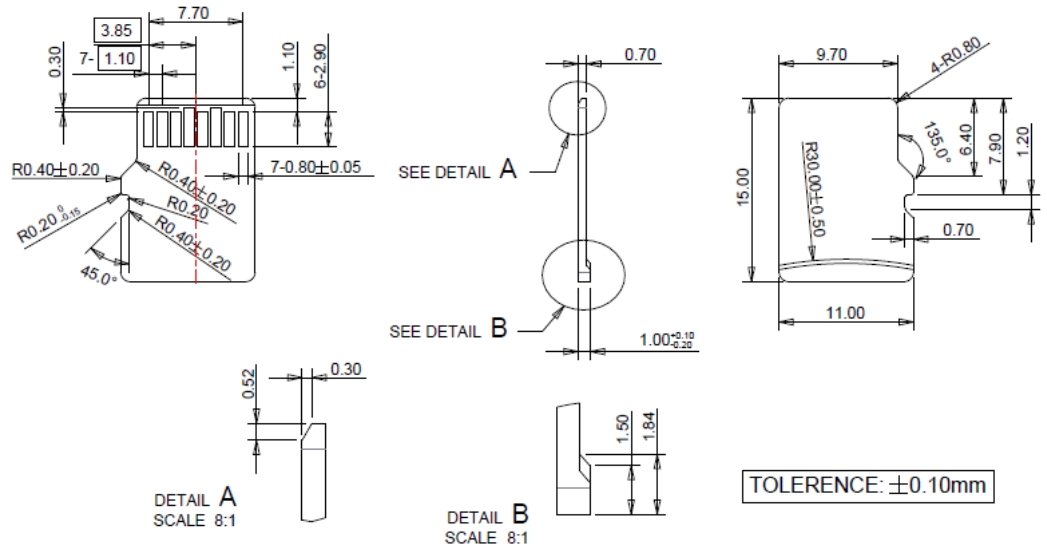

Specifications

| | |
|-------------------------------|---|
| Interface | SD 3.0 |
| Flash Type | iSLC |
| Capacity | 8GB~128GB |
| Max. Channels | 1 |
| Sequential R/W (MB/sec, max.) | 90/80 |
| Max. Power Consumption | TBD |
| Thermal Sensor | - |
| Extended DRAM buffer | - |
| H/W Write Protect | - |
| ATA Security | - |
| S.M.A.R.T. | Y |
| Dimension (WxLxH) | 11.0 X 15.0 X 1.0 mm |
| Environment | Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -25°C ~ +85°C MTBF: 3 million hours |

Ordering Information

| Operation Temp. | 8GB | 16GB | 32GB | 64GB | 128GB |
|-------------------------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Standard Grade (-25°C ~ +85°C) | DESDM-08GS06EE1SF | DESDM-16GS06GE1SL | DESDM-32GS06GE1SL | DESDM-64GS06GE1SL | DESDM-A28S06GE1SL |
| Industrial Grade (-40°C ~ +85°C) | DESDM-08GS06EW1SF | DESDM-16GS06GW1SL | DESDM-32GS06GW1SL | DESDM-64GS06GW1SL | DESDM-A28S06GW1SL |

innodisk

www.innodisk.com